



FURUKAWA ROCK DRILL USA  
*Rock Drill Division*

Choose Your  
**HCR L110** **-E5**

With HD828 or HD836 Drifter



EPA Tier 4 Final / EU Stage V



# Two Drifter Options for Increased Versatility

HCR L110 **E5**

## Choose the best drifter for your job.

The HCR L110 allows you to choose from two different drifters, depending on your specific application needs.

The HD828 drifter:

- Hole diameters from 3.5" to 5"
- Operates at up to 190 rpms
- Blow speed of 2,700 - 3,300 bpm.

The HD836 drifter:

- Hole diameters from 4" to 6"
- Operates at up to 150 rpms
- Blow speed of 2,600 - 3,100 bpm.

Use the HD828 drifter to drill holes from 3.5" to 5", or step up to the HD836 drifter for holes from 4" to 6" (using GT60 drill steel)

Whether you choose the HD828 drifter or step-up to the HD836, you will benefit from dependable performance and easy operation.



## Maximize operator performance with the ultimate in ergonomic cab designs.

HCR L110 cabs are ergonomically friendly with features that reduce operator fatigue. Cabs are 51" (1,300mm) with ROPS/FOPS standard. In addition, all cabs are air-conditioned and continuously pressurized with filtered air to maintain a comfortable operating environment. Other features include:

- Rubber-mounted engine frame isolates cab from engine vibrations.
- Joy stick drilling control for easy operation.
- Large windows maximize operator visibility.
- Walk-around ground level maintenance provides fast, easy upkeep or repair.
- All-In-One display allows operator to monitor machine functions while remaining focused on the drilling.



## Combining performance and economy.

Combining performance and economy, the HCR L110 is the perfect drill for quarries or construction sites. Simple, durable and efficient, the HCR L110 series incorporates a self-adjusting drill system that ensures high productivity no matter what the drilling situation. By automatically controlling the impact force, feed force, rotation force and dual damper pressure, the HCR L110 continuously adapts to the changing rock conditions, increasing drilling performance and the life of drill tools while decreasing fuel consumption.

## Manage fuel savings.

With FRD's TFSS (total fuel savings system), the operator selects the optimum engine speed for the application, allowing all fuel savings functions to be automatically managed during drilling operation.



## Added features bring versatility.

- Low-emission C9 3B engine offers low fuel consumption and meets US exhaust emissions regulations.
- Advanced rotary rod changer allows easy drill rod changes. Operators can add and remove rods using a single lever.
- HCR L110-E5 features 12' or 14' rods with extendable boom for increased drill pattern.
- Heavy-duty undercarriage – featuring a pentagonal section design to reduce dirt build-up and track wear – ensures strength and durability.
- High-output compressor increases flushing air, provides faster drilling and decreases bit wear.
- Reliable dust control system with increased suction capacity provides effective pre-cleaning to reduce the escape of rock dust. An optional dust suppression system is available for difficult drilling conditions.
- Choose from an HD828 or HD836 drifter to meet your specific application needs.


- Options available, but not limited to:
  - 2D/3D angle indicator.
  - Water dust suppression.
  - Heavy-duty rear-mounted bumper.
  - Cold-start kit.
  - Rear camera.



Reliable dust control system.





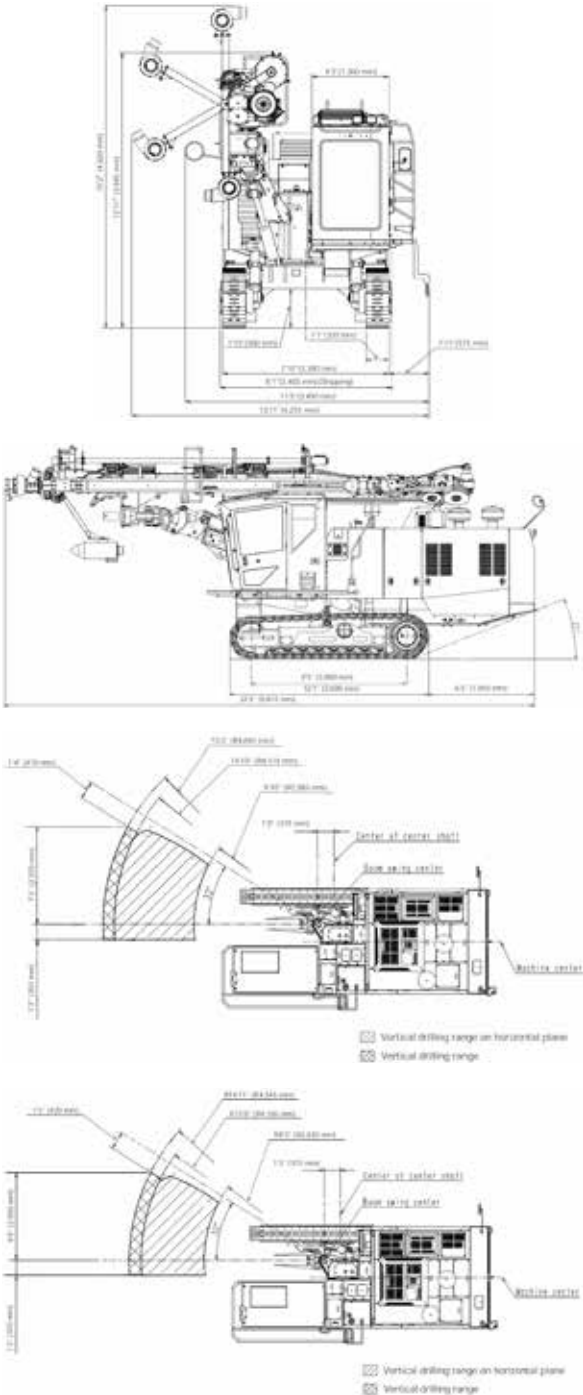

Note:  
 \*1 "Overall Weight (A)" includes weights of fuel and oils (full).  
 \*2 "Overall Weight (B)" includes weight of "Overall Weight (A)", operator, rod and bit.  
 \*3 "Ground Contact Pressure" is calculated based on "Overall Weight (A)".

CAT is a registered trademark of Caterpillar, Inc.  
 AIRMAN is a registered trademark of HOKUETSU INDUSTRIES CO., LTD.  
 Furukawa's policy is one of continual improvement. Specifications may change between printing.



**FURUKAWA ROCK DRILL USA**

**Rock Drill Division**  
 805 Lake Street  
 Kent, Ohio 44240-0017  
 Phone: 800.358.4476  
 Fax: 330.673.8504

[www.furukawarockdrill.com](http://www.furukawarockdrill.com)



	HCR L110-E5		HD-828		HD-836	
	US Standard	Metric	US Standard	Metric	US Standard	Metric
<b>Dimensions and Weight</b>	Overall Weight (A) *1	43,541 lbs	19,750 kg	43,541 lbs	19,750 kg	
	Overall Weight (B) *2	45,415 lbs	20,600 kg	45,415 lbs	20,600 kg	
	Overall Length	32'10"	10,015 mm	32'10"	10,015 mm	
	Shipping Length	36'7"	11,160 mm	36'7"	11,160 mm	
	Overall Width	11'5"	3,490 mm	11'5"	3,490 mm	
	Shipping Width	8'1"	2,465 mm	8'1"	2,465 mm	
	Overall Height	15'2"	4,620 mm	15'2"	4,620 mm	
	Shipping Height	11'7"	3,520 mm	11'7"	3,520 mm	
<b>Drifter</b>	Model	HD828		HD836		
	Weight	597 lbs	271 kg	772 lbs	350 kg	
	Length	3'9"	1,148 mm	3'10"	1,171 mm	
	Width	1'3"	387 mm	1'4"	418 mm	
	Height	1'1"	328 mm	1'3"	375 mm	
	Number of Blows	2,700 - 3,300 bpm		2,600 - 3,100 bpm		
<b>Undercarriage</b>	Rotating Speed	0 - 190 rpm	0 - 190 min <sup>-1</sup>	0 - 120 rpm	0 - 120 min <sup>-1</sup>	
	Track Length	12'1"	3,690 mm	12'1"	3,690 mm	
	Track Length on Ground	9'5"	2,880 mm	9'5"	2,880 mm	
	Track Width	1'1"	330 mm	1'1"	330 mm	
	Ground Contact Pressure *3	14.8 psi	101.8 kPa	14.8 psi	101.8 kPa	
	Ground Clearance	1'10"	560 mm	1'10"	560 mm	
	Frame Oscillation Angle	±7.5°				
	Tramming Speed	0 - 2.0 mph	0 - 3.3 km/h	0 - 2.0 mph	0 - 3.3 km/h	
	Gradeability	57.4% (30°)				
	Maximum Traction Force	28,551 lb-force	127 kN	28,551 lb-force	127 kN	
<b>Engine</b>	Make & Model	CAT® / C9.3B (Tier4Final, Stage V)				
	Type	Diesel, Water-Cooled, 6 Cylinders				
	Piston Displacement	567.5 cu in	9.3 L	567.5 cu in	9.3 L	
	Power Output	375 hp / 2,200 rpm	280 kW / 2,200 min <sup>-1</sup>	375 hp / 2,200 rpm	280 kW / 2,200 min <sup>-1</sup>	
	Fuel Capacity	158.5 gal	600 L	158.5 gal	600 L	
	DEF Capacity	11.8 gal	44.7 L	11.8 gal	44.7 L	
<b>Hydraulic Equipment</b>	Variable Displacement Pump	PV Pump x2				
	Fixed Displacement Pump	Gear Pump x3				
	Hydraulic Oil Reservoir Capacity	63.4 gal	240 L	63.4 gal	240 L	
<b>Boom</b>	Model	JE326-134				
	Type	Extension Boom				
	Boom Lifting Angle (Up / Down)	41° / 20°				
	Boom Swing Angle (Right / Left)	32° / 0°				
	Boom Slide Length	2'11"	900 mm	1'12"	600 mm	
<b>Guide Shell</b>	Model	GH832-33				
	Length	28'7"	8,700 mm	28'7"	8,700 mm	
	Feed Length (For 14')	17'2"	5,225 mm	17'2"	5,225 mm	
	Feed Length (For 12')	15'1"	4,595 mm	-	-	
	Feed Type	Hydraulic Motor Driven Chain				
	Guide Slide Length	4'11"	1,500 mm	4'11"	1,500 mm	
	Guide Swing Angle (Right / Left)	25° / 90°				
	Guide Tilt Angle	170°				
<b>Compressor</b>	Maximum Pulling Force	7,644 lb-force	34 kN	7,644 lb-force	34 kN	
	Make & Model	AIRMAN / PDSF290-S16				
	Type	1-Stage Screw Compressor				
	Discharge Airflow	477 cfm	13.5 m³/min	477 cfm	13.5 m³/min	
<b>Dust Collector</b>	Discharge Pressure	149 psi	1.03 MPa	149 psi	1.03 MPa	
	Model	A885-44				
	Suction Capacity	1,413 cfm	40 m³/min	1,413 cfm	40 m³/min	
	Number of Filter Elements	6				
	Dust Removal System	Automatic Air Pulse Jet				
<b>Rod Changer</b>	Suction Cap	Slide Type				
	Model	GR803-31				
	Number of Rod Storage	7 (For T51) pcs		7 (GT60) / 6 (GT60-TUBE) pcs		
<b>Bit and Rod</b>	Rod Diameter	2.0"	51 mm	2.36" / 3.43"	60 mm / 87 mm	
	Number of Control Levers	1 pcs				
	Bit Range	4.0" - 5.0"	102 - 127 mm	4.0" - 5.5"	102 - 140 mm	
	Rod Type	T51		GT60 / GT60-TUBE		
	Rod Length	12' / 14'	3,660 mm / 4,270 mm	14'	4,270 mm	
<b>Electrics</b>	Starter Rod Length	14'	4,270 mm	18'	5,490 mm	
	Battery	12V; 160Ah/5h x2				
	Light	24V; 70W x4				
<b>Operating Environment</b>	Voltage	DC 24V				
	Working Temperature	5° - 113° F	-15° - 45° C	5° - 113° F	-15° - 45° C	
	Maximum Altitude	8,202'	2,500 m	8,202'	2,500 m	