


OLIN ENGINEERING, INC

15622 COMPUTER LN HUNTINGTON BEACH, CA 92649 PH 714 897 1230 F 714 892 9268

WWW.OLINPUMP.COM INFO@OLINPUMP.COM



SPECIFICATIONS 5 25/30 1/2" MINUS PUMP

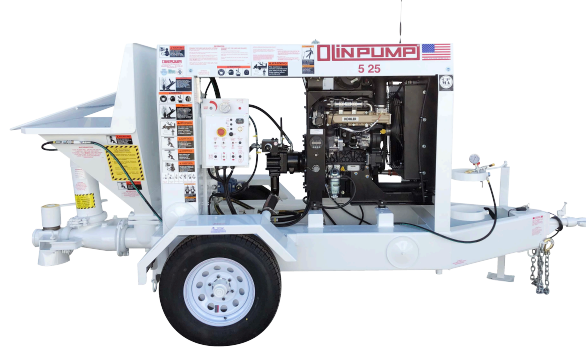

	5 25	5 30
OUTPUT: cmh /cyh		29/38
DELIVERY PRESSURE: bar/psi		77/1100
DELIVERY CYLINDER: mm/inch		127/5
STROKE: mm/inch		305/12
STROKES/MINUTE:		125
ENGINE POWER: kw/hp	36/48	48/65
HOPPER CAPACITY: l/gal		88/40
OUTLET: mm/inch		100/4
OIL COOLER	OPTIONAL	YES
CONTROL SYSTEM:	ELECTRIC/HYDRAULIC	
HYDRAULIC CAPACITY: l/gal		171/78
WEIGHT: kg/lbs	1792/3950	1823/4020

The OLINPUMP 5 25 is the only 1/2" minus hydraulic Ball Valve concrete pump that is exempt of CARB and AQMD permitting. The 48 HP Deutz 3 cyl diesel engine combined with simple, efficient hydraulics, yields over 30 YPH production rates, and can push as far and as high as any pump on the market.



*All OLIN Ball Valve pumps feature del'y system pressure release valve standard.



CONCRETE - GROUT - SHOTCRETE

