

BAUER BG 23 H

Rotary Drilling Rig

Base Carrier BT 65

PremiumLine



The BG PremiumLine stands for multifunction equipment for a variety of foundation construction systems. The selection between two model ranges allows an optimum choice for differing project or transportation requirements.


Specific highlights of the BG PremiumLine are:

- High safety standards
- Environmental sustainability, economic efficiency and performance
- Easy transport and short rigging time
- High quality standard
- Long lifetime and excellent resale value

The H-Model Line

Special features of the H-model line are:

- Fast loading onto transport vehicles
- Easy rigging on-site due to compact design
- Rapid shifting to new working positions at construction sites with underpasses or below low bridges



**BG 23 H
BT 65**



**BG 23 H
BT 75**





**BG 28 H
BT 75**


The V-Model Line

Special features of the V-model line are:


- Big borehole diameters
- Large drilling depths
- Extended service intervals and power transmission with low vibrations due to the robust design of the kinematic system

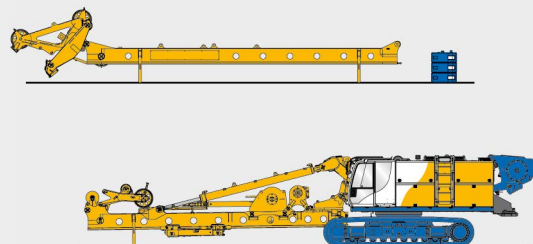

**BG 33
BT 85**




**BG 36
BS 95**

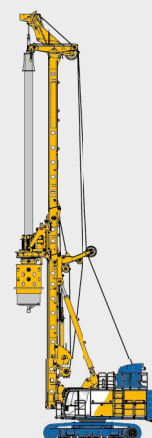

**BG 45
BS 95**

The Rotary Drilling Rig BG 23 H PremiumLine (BT 65)

Max. drilling diameter:	1,500 mm
Max. drilling depth:	53.7 m
Max. torque:	235 kNm
Max. height:	22.2 m
Engine:	CAT C 7.1 186 - 225 kW




BG 28 H
BT 85




BG 33 H
BT 85




BG 36 H
BS 95

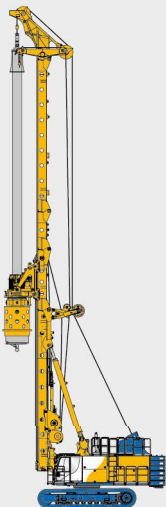

BG 55
BS 115

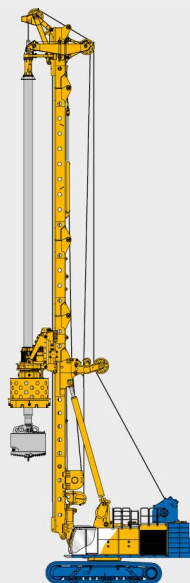

BG 72
BT 180

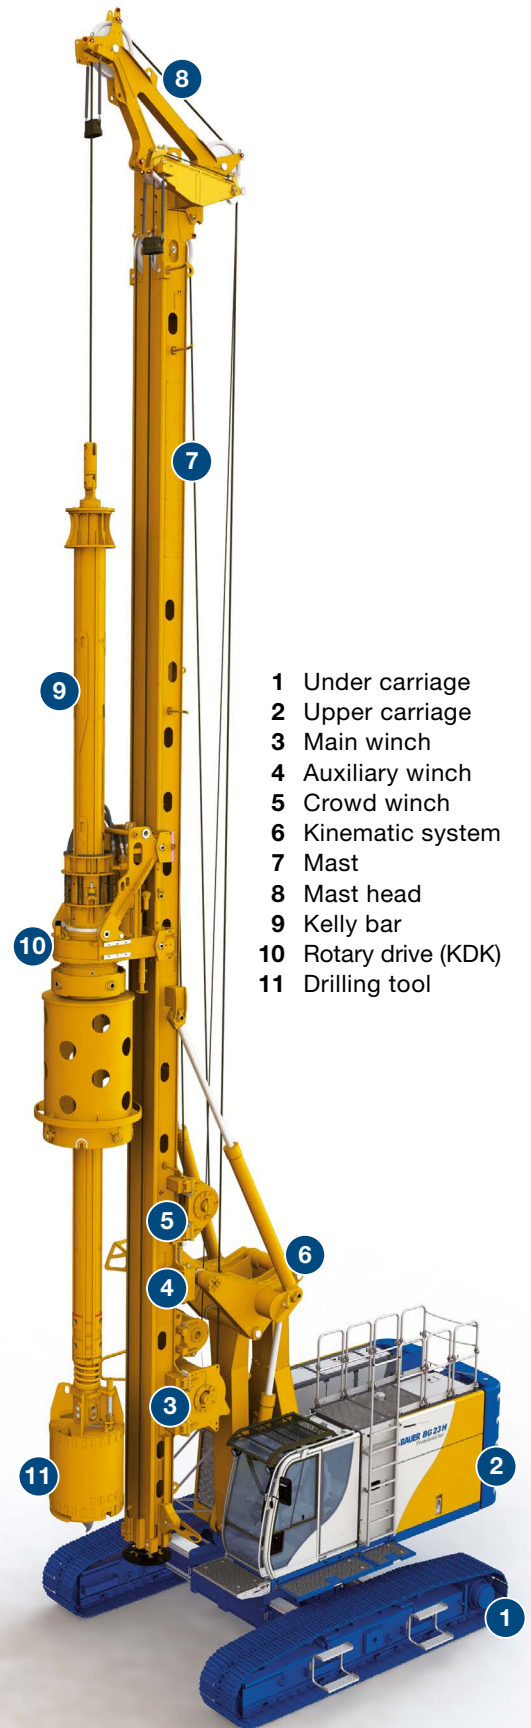


- 1 Under carriage
- 2 Upper carriage
- 3 Main winch
- 4 Auxiliary winch
- 5 Crowd winch
- 6 Kinematic system
- 7 Mast
- 8 Mast head
- 9 Kelly bar
- 10 Rotary drive (KDK)
- 11 Drilling tool



- Modern, ergonomic operator's cab**
- FOPS compliant with additional protective roof guard
 - Premium operator seat, air-sprung, heatable and air-conditioned
 - Joystick controls with high functionality
 - B-Drive for multi-functional potentiometer input

Powerful CAT engines

- C 7.1 186 kW or C 7.1 225 kW (ORA* or Stage V / Tier 4 final)
- Diesel particulate filter in exhaust emission standard Stage V / Tier 4 final
- Low noise emission
- Worldwide CAT service partners

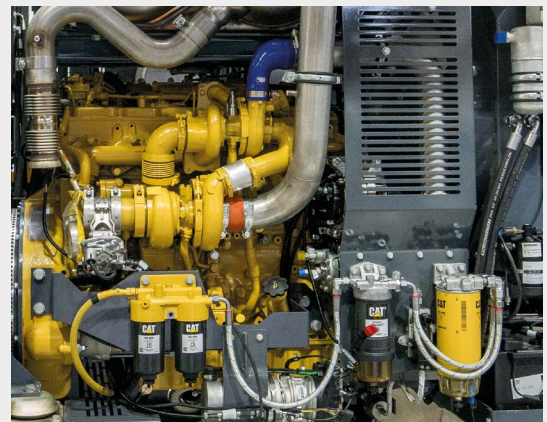

Safety equipment

- Integrated service platforms in the upper carriage for easy and safe maintenance work
- Retractable gratings beside the cab
- Guardrails on top of the upper carriage (foldable for transport)
- Rear view cameras



- Reduction of fuel consumption by up to 30%
- Increased productivity through improved efficiency
- Significantly reduced noise levels
- Tried and proven suitability for practical application
- Optimized parallel operation of main and auxiliary consumers

* Exhaust emission equivalent Tier 3/Stage III A emission standard

Compact, powerful and versatile



- Fast mobilization and comfortable moving of the rig
- Transport possible with rotary drive attached and Kelly bar installed
- Flexible and efficient operation, even on confined jobsites




**Single Pass SPEX
Extreme**

Flexible mast concept

- Multi-sectional mast
 - Low-head version
 - Giant drill version
 - Extension package Single Pass Extreme (SPEX)
For further details please refer to page 21
 - Optimized transport length
- Lattice mast extension
- Vario mast head
 - Mast head for drill axis 900 mm
 - Maximum stroke, even when using an upper Kelly guide
 - Tiltable main jib for single-pass methods and optimized transport length

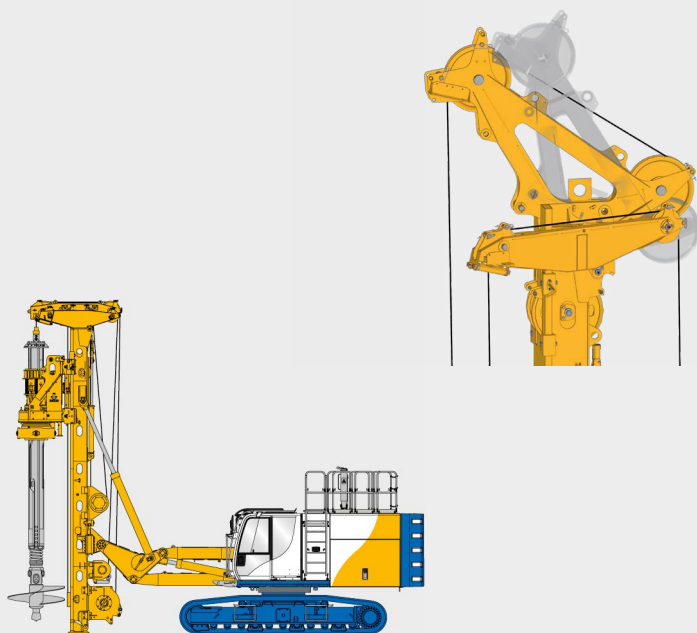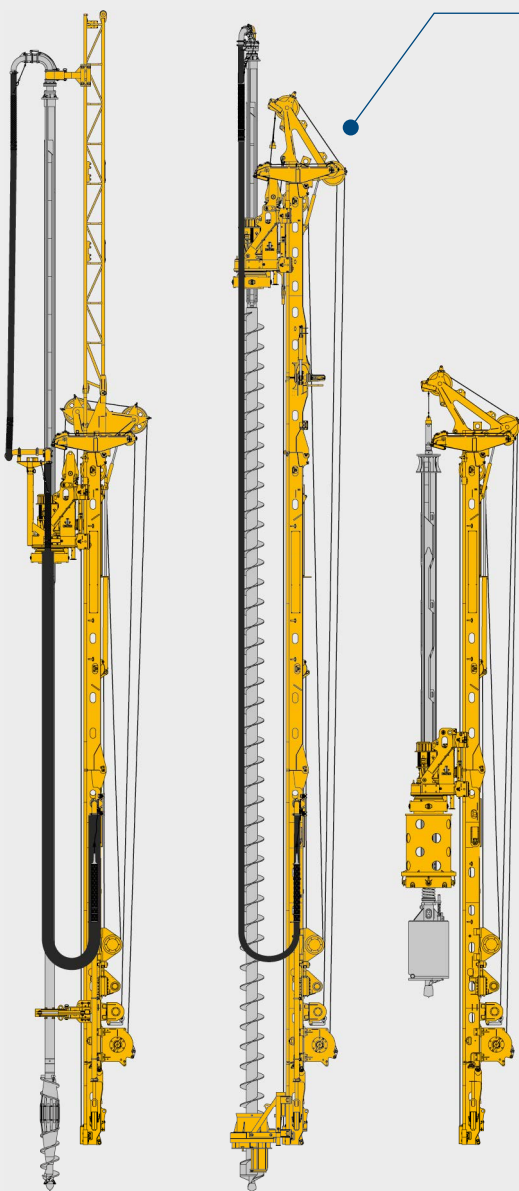

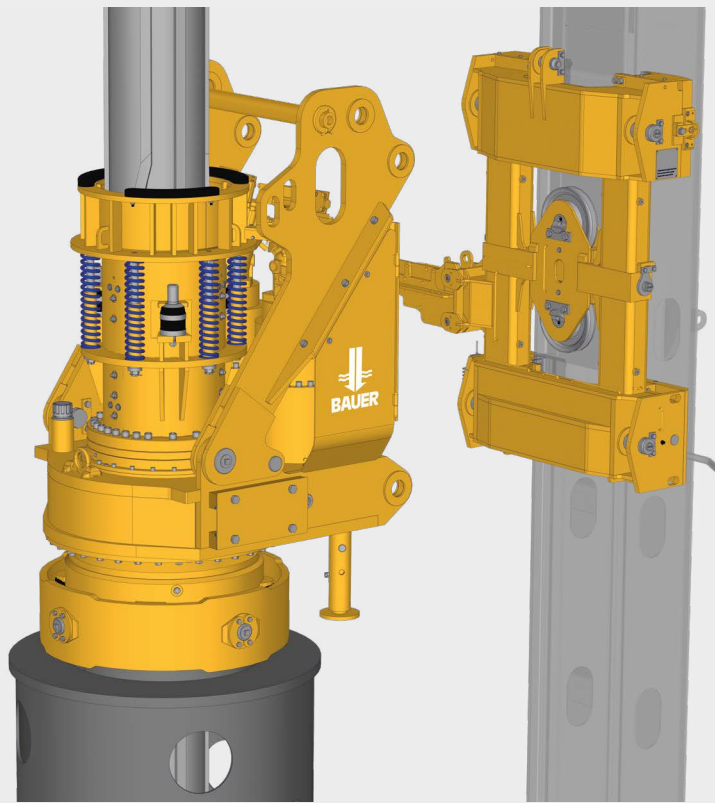


Rotary drive

- Optional single gear drive or multi gear drive
- Max. torque 235 kNm
- Max. speed 64 rpm
- Various modes of operation, partially selectable speed of rotation and torque


Kelly set-up with a long Kelly guide and integrated shock absorbing system with Kelly visualization


- Enhanced drilling performance
- High operation comfort
- Reduction of wear on Kelly bars and drive keys

KDK 235 K

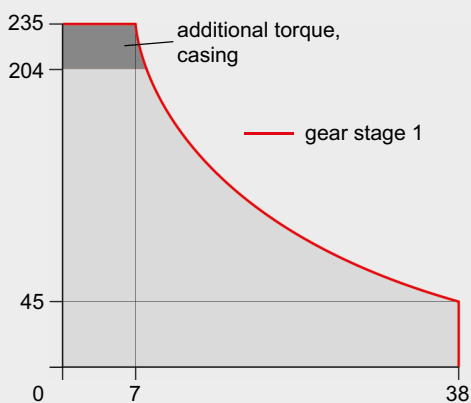


KDK 235 S

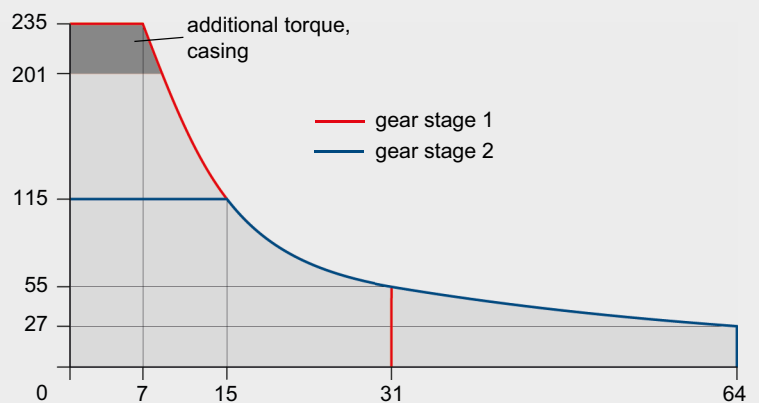



BG 23 H PremiumLine | © BAUER Maschinen GmbH 2/2021

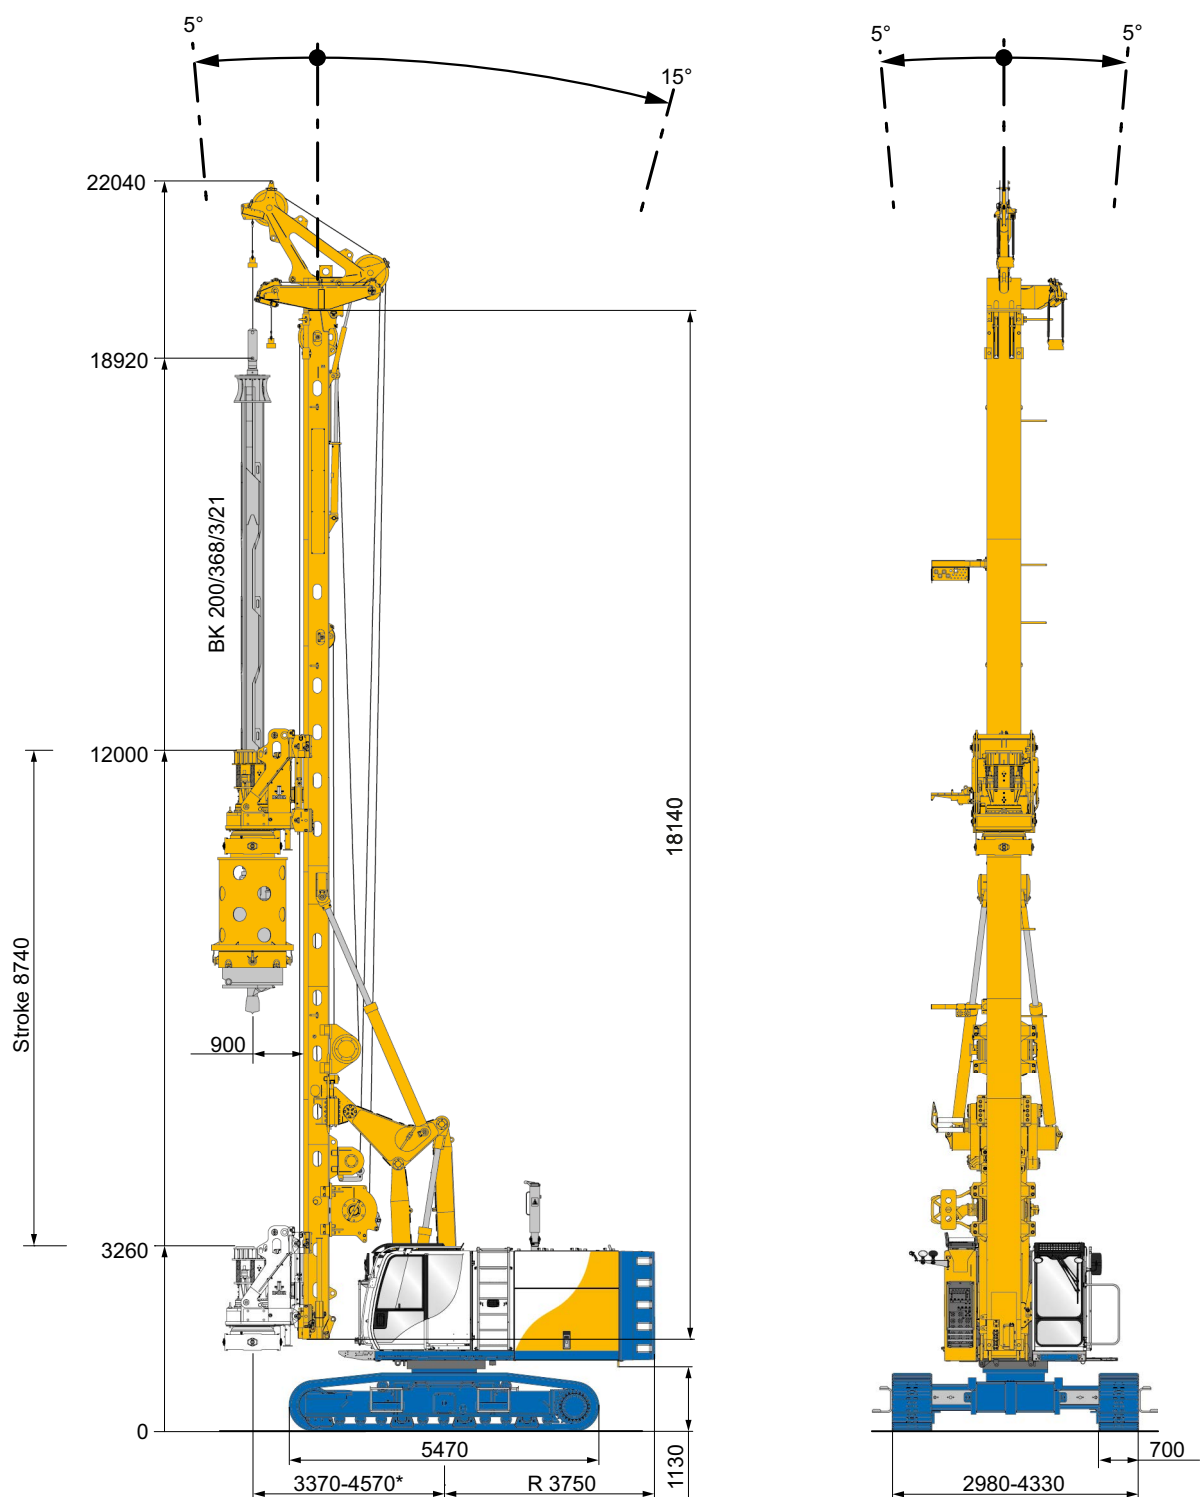

Operating weight 69.7 t
(as shown)

* depending on equipment

Rotary drive (selectable)		KDK 235 K	KDK 235 S
Torque (nominal) for casing operation at 350 bar		235 kNm	235 kNm
Torque (nominal) for drilling at 350 bar		204 kNm	201 kNm
Max. speed of rotation		38 rpm	64 rpm
Crowd winch		Compact Version	Basic / Upgraded version
Winch classification		M6 / L3 / T5	
Max. sledge stroke		13,140 mm	15,580 mm
Crowd force push and pull, effective / nominal		260 / 333 kN	
Rope diameter		22 mm	
Speed (down / up)		10.5 m/min	
Fast speed (down / up)		29.5 m/min	
Main winch		Compact Version	Basic / Upgraded version
Winch classification		M6 / L3 / T5	
Line pull (1st layer) effective / nominal		140 / 173 kN	170 / 210 kN
Rope diameter		22 mm	26 mm
Max. line speed		84 m/min	
Auxiliary winch (selectable)			
Winch classification		M6 / L3 / T5	
Line pull (1st layer) effective/nominal		55 / 70 kN	65 / 80 kN
Rope diameter		15 mm	
Max. line speed		62 m/min	
Base carrier (EEP)		BT 65	
Engine		CAT C 7.1	CAT C 7.1
Rated output ISO 3046-1		186 kW @ 1,850 rpm	225 kW @ 1,850 rpm
Exhaust emission	EU 2016/1628	ORA*	Stage V
	EPA/CARB	ORA*	Tier 4 final
	GB20891-2014	China Stage III	-
Diesel tank capacity / AdBlue Tank		540 / – l	540 / 34.5 l
Sound pressure level in the cabin (EN 16228, Annex B)		LP _A 80 dB (A)	
Sound power level (2000/14/EC u. EN 16228, Annex B)		LW _A 108 dB (A)	
Hydraulic pressure		350 bar	
Hydraulic tank capacity		450 l	
Flow rates		2 x 220 + 1 x 280 + 1 x 135 l/min	
Under carriage		Compact Version	Basic / Upgraded version
Under carriage		UW 50	UW 60
Crawler type		B 60	B 60
Traction force effective / nominal		340 / 400 kN	450 / 530 kN
Transport width		2,500 mm	3,000 mm

* Exhaust emission equivalent Tier 3/Stage III A emission standard



Kelly Drilling



Cased Kelly Drilling
Installation with Oscillator



CFA
Continuous Flight
Auger Drilling




FDP
Full Displacement Piling
(Standard or Lost Bit)




FoW
Front of Wall



TR*
Vibrator



SCM
Single Column Mixing



HDI*
Jet Grouting

* not possible with compact version

Base carrier BT 65

Standard

- Retractable gratings beside cab
- Cameras for rear area surveillance
- Integrated service platforms

Optional

- Compressor 1,000 l/min
- Electric generator 13 kVA
- Cab space heater incl. time switch
- Arctic kit
- Additional camera (at customized location)
- Weather protection
- Remote control Basic / Multi

Drilling rig attachment

Standard

- Vario mast head
- Pivoted and adjustable anchor point for auxiliary rope

Optional

- Mast support unit
- Vario mast head
- Extension package Single Pass Extreme (SPEX) (upgraded version)
- Attachment of casing oscillator
- Concrete line attachment
- Attachment of slurry line

Rotary drive

Standard

- Rotary drive KDK 235 K
- Selectable modes of operation
- Kelly drive adapter for outer Kelly tube 368 mm
- Quick-release hydraulic couplers

Optional

- Rotary drive KDK 235 S

Measuring and control system

Standard

- Automatic mast alignment with memory function
- Crowd stroke monitoring
- Kelly visualization
- Electronic mast limit control

Optional


- Electronic load sensing for auxiliary winch
- Recording of concrete pressure and volume for Single-Pass processes
- Software modules for further applications
- Adaptive Kelly speed assistant
- Automatic drilling and extraction control for Single-Pass processes
- BAUER Enhanced CAN Interface (BECI)
- Crowd Plus



Adaptive Kelly speed assistant


The assistant raises and lowers the Kelly bar safely and quickly and allows an easy operation. The automatic control of the speed of the main winch reduces the speed at the transition points of the Kelly sections.

This provides maximum safety with minimum wear. The permanent monitoring of the parameters prevents a locked Kelly bar from being raised or lowered accidentally and thus causing damage.




Kelly visualization

Display of the locking recesses and the correct extension and retraction of the Kelly bar on the B-Tronic system. The rapid approach of the locking position results in a considerably enhanced drilling performance. In addition, the level of wear that the Kelly bar and drive keys are subject to is significantly reduced.




Kelly drilling assistant

Saves the current crowd speed and the speed of the rotary drive. It enhances drilling performance with simultaneous hands-free operation. Drilling parameters can be adjusted during the automated drilling procedure.



Automatic drilling and extraction control for Single-Pass processes




The system controls the drilling and / or extraction speed of the crowd system and enables hands-free operation. This ensures the production of a high-quality pile while simultaneously minimizing the amount of concrete.



Satellite-based positioning


The BAUER Assistant Positioning System (B-APS) allows the position of a bored pile to be located extremely accurately. Documentation is provided for the nominal and actual coordinates, as well as the corresponding accuracy of each bored pile. Manual marking of the piles is no longer required.

Numerous other assistance systems are available in our portfolio.

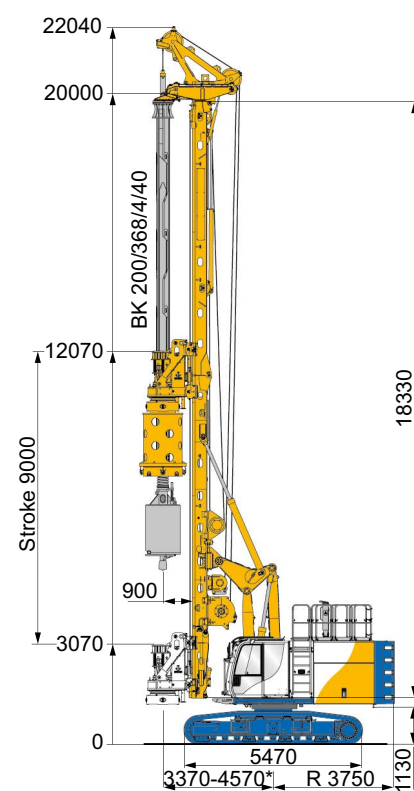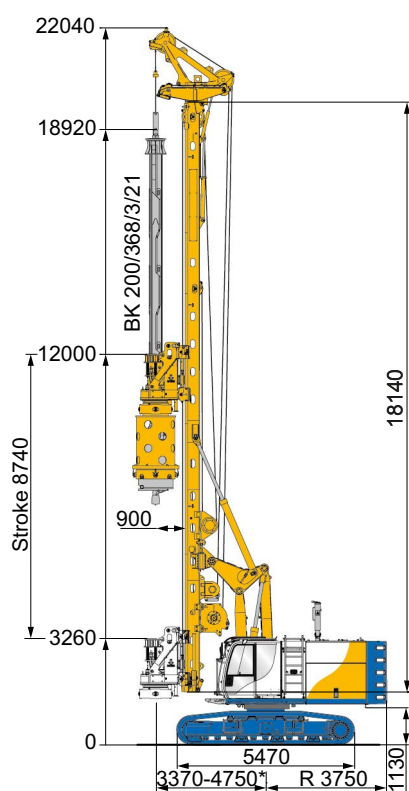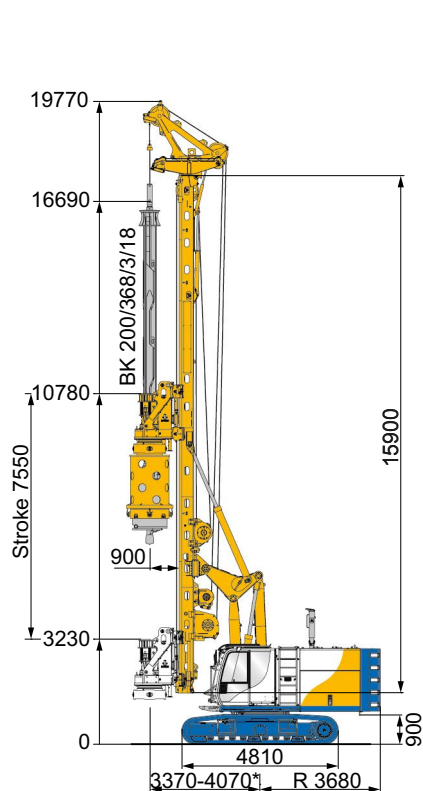

	Compact version	Basic version	Upgraded version
Under carriage	UW 50	UW 60	UW 60
Mast	Single section mast	Single section mast	Multi section mast
Unit height	19.8 m	22.0 m	22.0 m
Upper Kelly guide	without	without	with
Max. drilling diameter			
uncased	1,500 mm	1,500 mm	1,500 mm
cased	1,200 mm	1,200 mm	1,200 mm
Operating weight approx.	62.2 t	69.7 t	73.7 t
with Kelly BK 200/368/...	.../3/18	.../3/21	.../4/40
with casing drive adapter	1,180 mm	1,180 mm	1,180 mm
with bucket	1,060 mm	1,060 mm	1,060 mm
with counterweight *	7.6 t	10.0 t	10.0 t

* depending on equipment

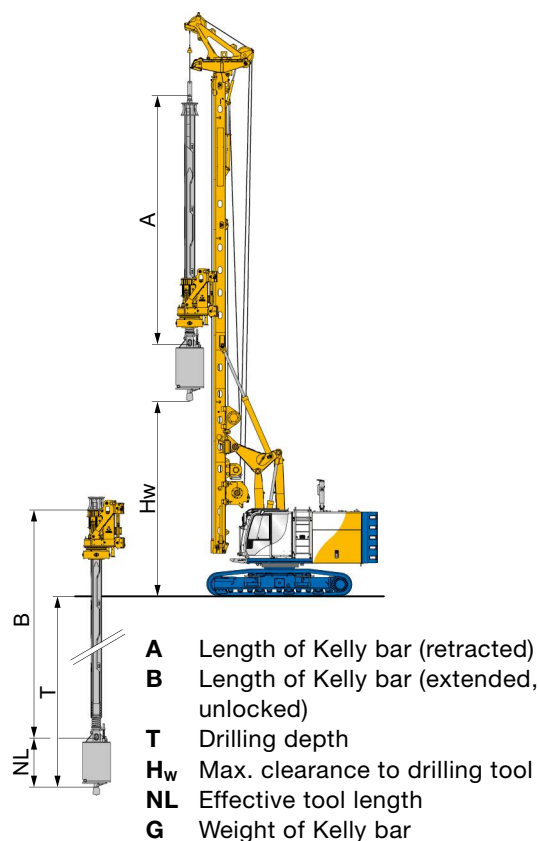

Drilling data as shown are based on tool length NL = 1.9 m, minimum horizontal mast reach and using Bauer attachment.
 Drilling depth is increased by 0.28 m when using maximum horizontal mast reach.

Drilling depth – uncased Kelly drilling, compact version


3-part Kelly bar	A (m)	B (m)	G (kg)	H _w (m)	T (m)
BK200/368/3/15	7.4	17.4	3,100	6.1	16.0
BK200/368/3/18	8.4	20.4	3,400	6.1	19.0
BK200/368/3/21	9.4	23.4	3,750	6.1	22.0
BK200/368/3/24	10.4	26.4	4,100	5.1	25.0
BK200/368/3/30	12.4	32.4	4,750	3.1	31.0

Drilling depth – uncased Kelly drilling, basic version/upgraded version


3-part Kelly bar	A (m)	B (m)	G (kg)	H _w (m)	T (m)
BK200/368/3/18	8.4	20.4	3,400	7.4	19.0
BK200/368/3/21	9.4	23.4	3,750	7.4	22.0
BK200/368/3/24	10.4	26.4	4,100	7.4	25.0
BK200/368/3/27	11.4	29.4	4,400	6.4	28.0
BK200/368/3/30	12.4	32.4	4,750	5.4	31.0
BK200/368/3/33	13.4	35.4	5,100	4.4	34.0
4-part Kelly bar					
BK200/368/4/28	9.5	31.1	5,050	7.4	29.7
BK200/368/4/32	10.5	35.1	5,550	7.3	33.7
BK200/368/4/36	11.5	39.1	6,000	6.3	37.7
BK200/368/4/40	12.5	43.1	6,500	5.3	41.7
BK200/368/4/48	14.5	51.1	7,500	3.3	49.7
BK200/368/4/52	15.5	55.1	8,000	2.3	53.7


Further drilling depths, diameters and other Kelly types on request.

Kelly drilling with casing oscillator (compact version)

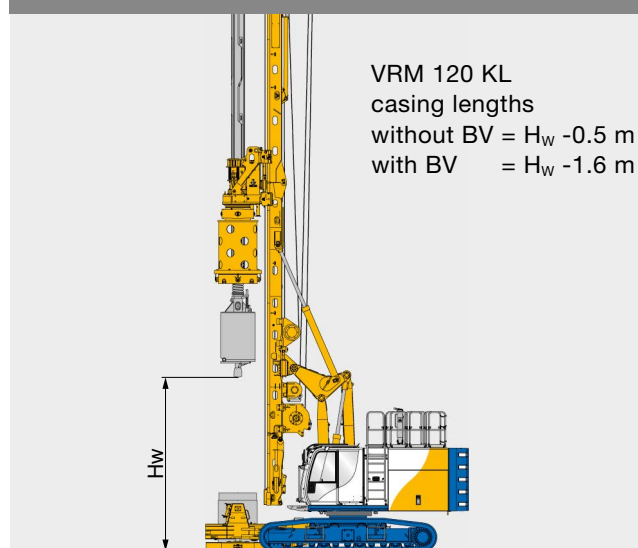


Kelly drilling with casing oscillator (basic / upgraded version)

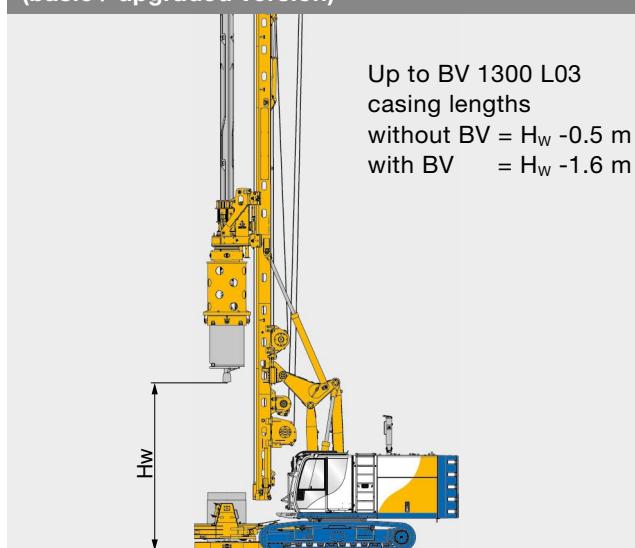

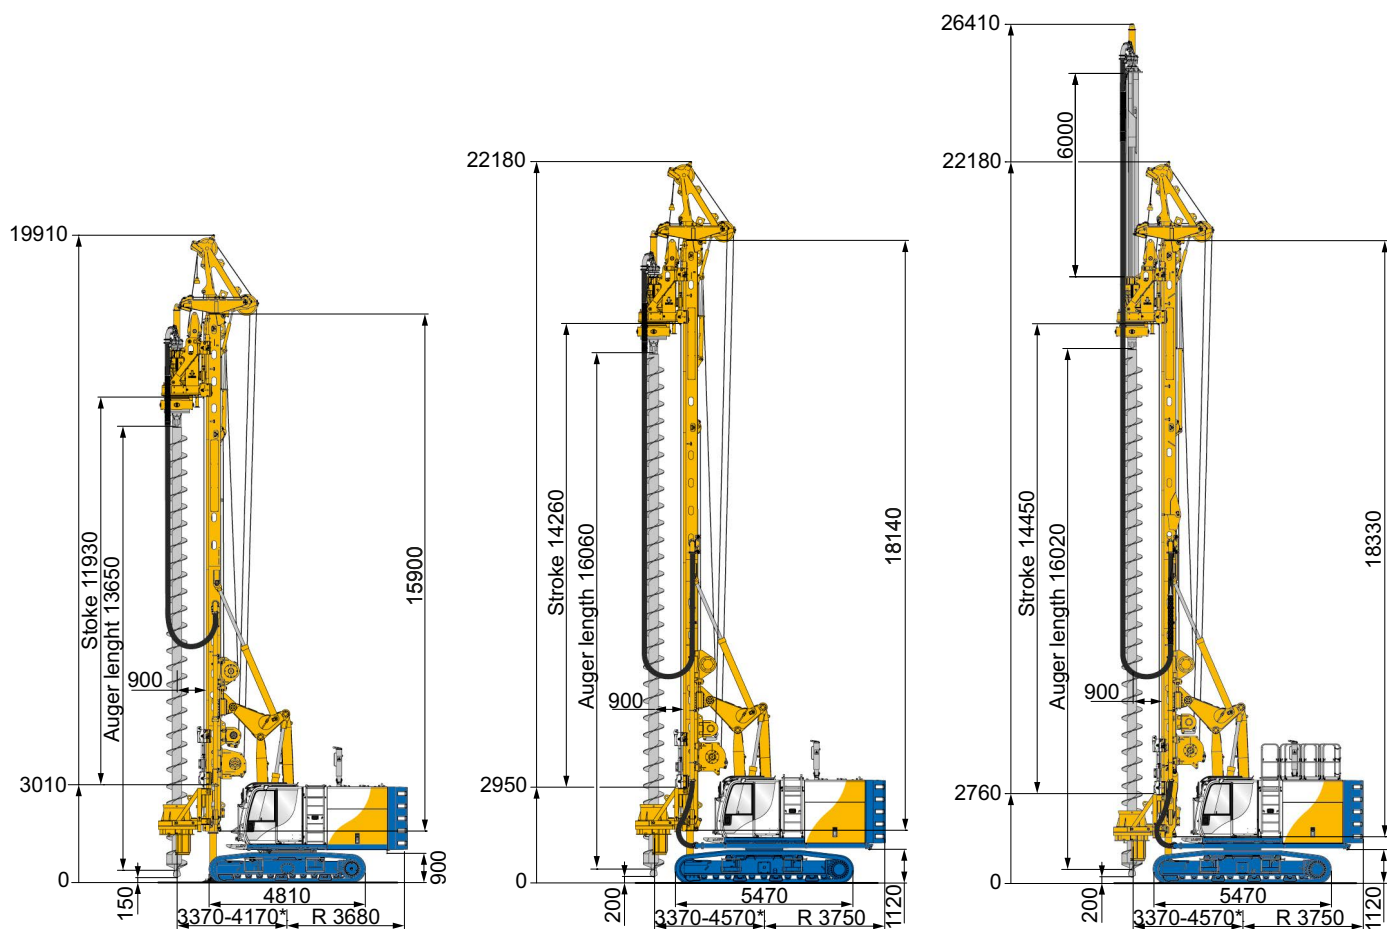

	Compact version	Basic version	Upgraded version
Under carriage	UW 50	UW 60	UW 60
Mast	Single section mast	Single section mast	Multi section mast
Unit height	19.9 m	22.2 m	22.2 m
Kelly extension	without / 4.0 m	without / 6.0 m	without / 6.0 m
Max. drilling diameter	750 mm	750 mm	750 mm
Drilling depth with auger cleaner	11.6 m / 15.6 m	13.8 m / 19.8 m	14.0 m / 20.0 m
Max. extraction force with main and crowd winch (effective)	540 kN	600 kN	600 kN
With counterweight	7.6 t	10.0 t	10.0 t


* depending on equipment

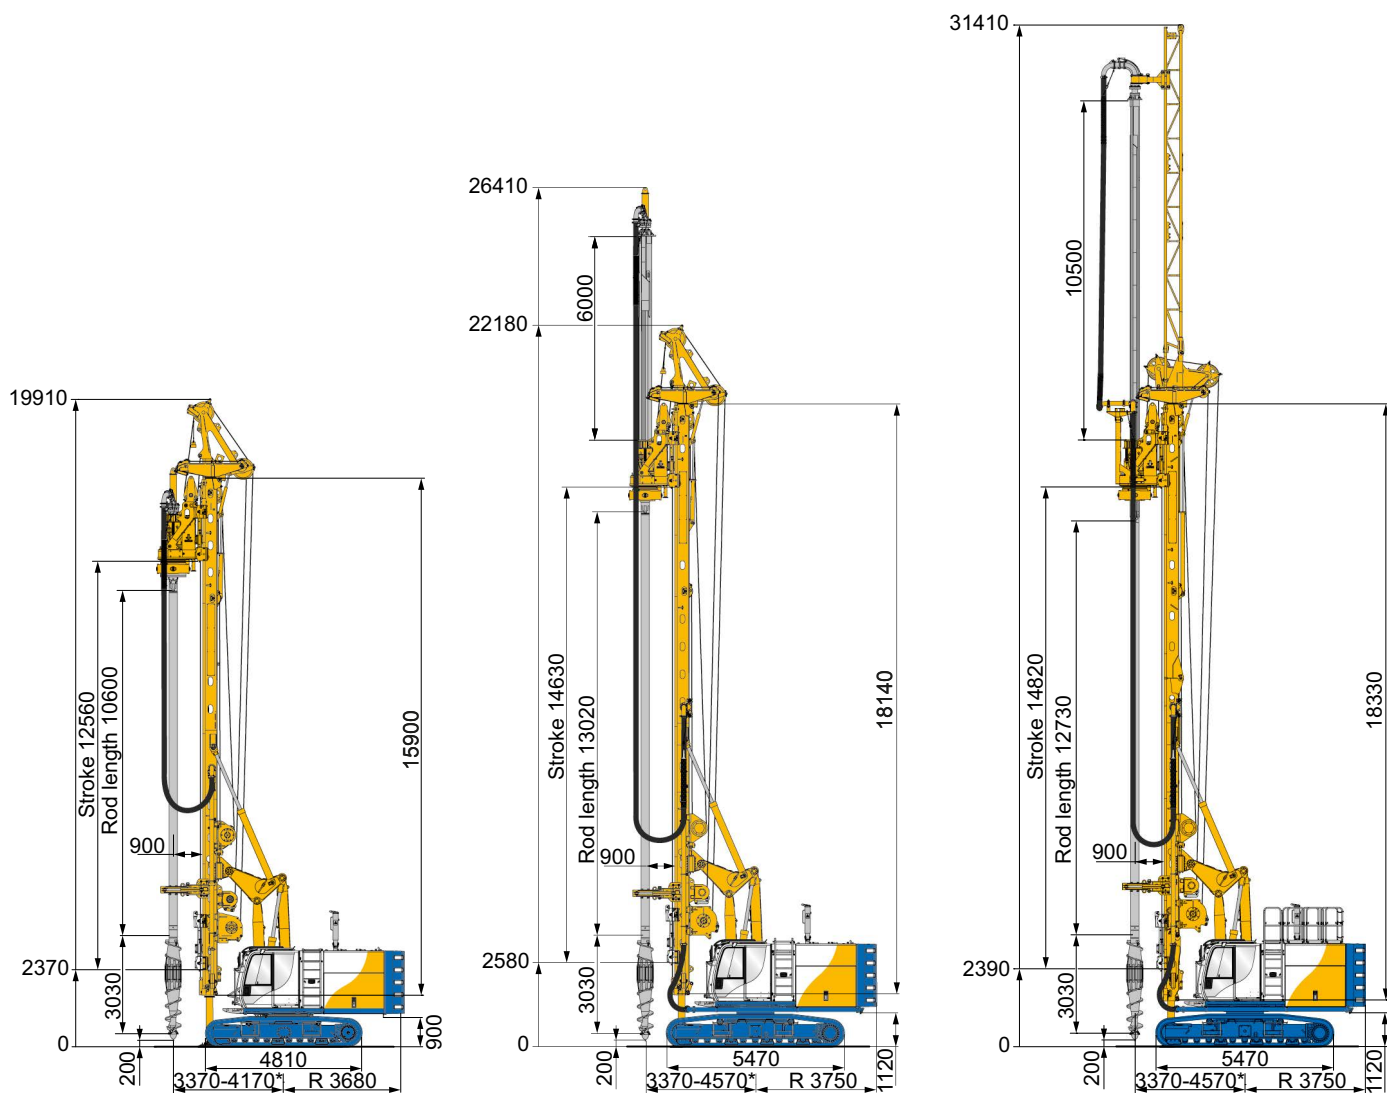

	FDP drilling Compact version	FDP drilling Basic version	FDP drilling Upgraded version
Under carriage	UW 50	UW 60	UW 60
Mast	Single section mast	Single section mast	Multi section mast
Unit height	19.9 m	22.2 m	22.2 m
Kelly extension	without / 4.0 m	without / 6.0 m **	without / 10.5 m
Max. drilling diameter	510 mm	510 mm	510 mm
Max. drilling depth	12.2 m / 16.2 m	14.2 m / 20.2 m	14.4 m / 24.9 m
Max. extraction force with main and crowd winch (effective)	540 kN	600 kN	600 kN
With counterweight	7.6 t	10.0 t	10.0 t

* depending on equipment



** 10.5 m with lattice mast extension

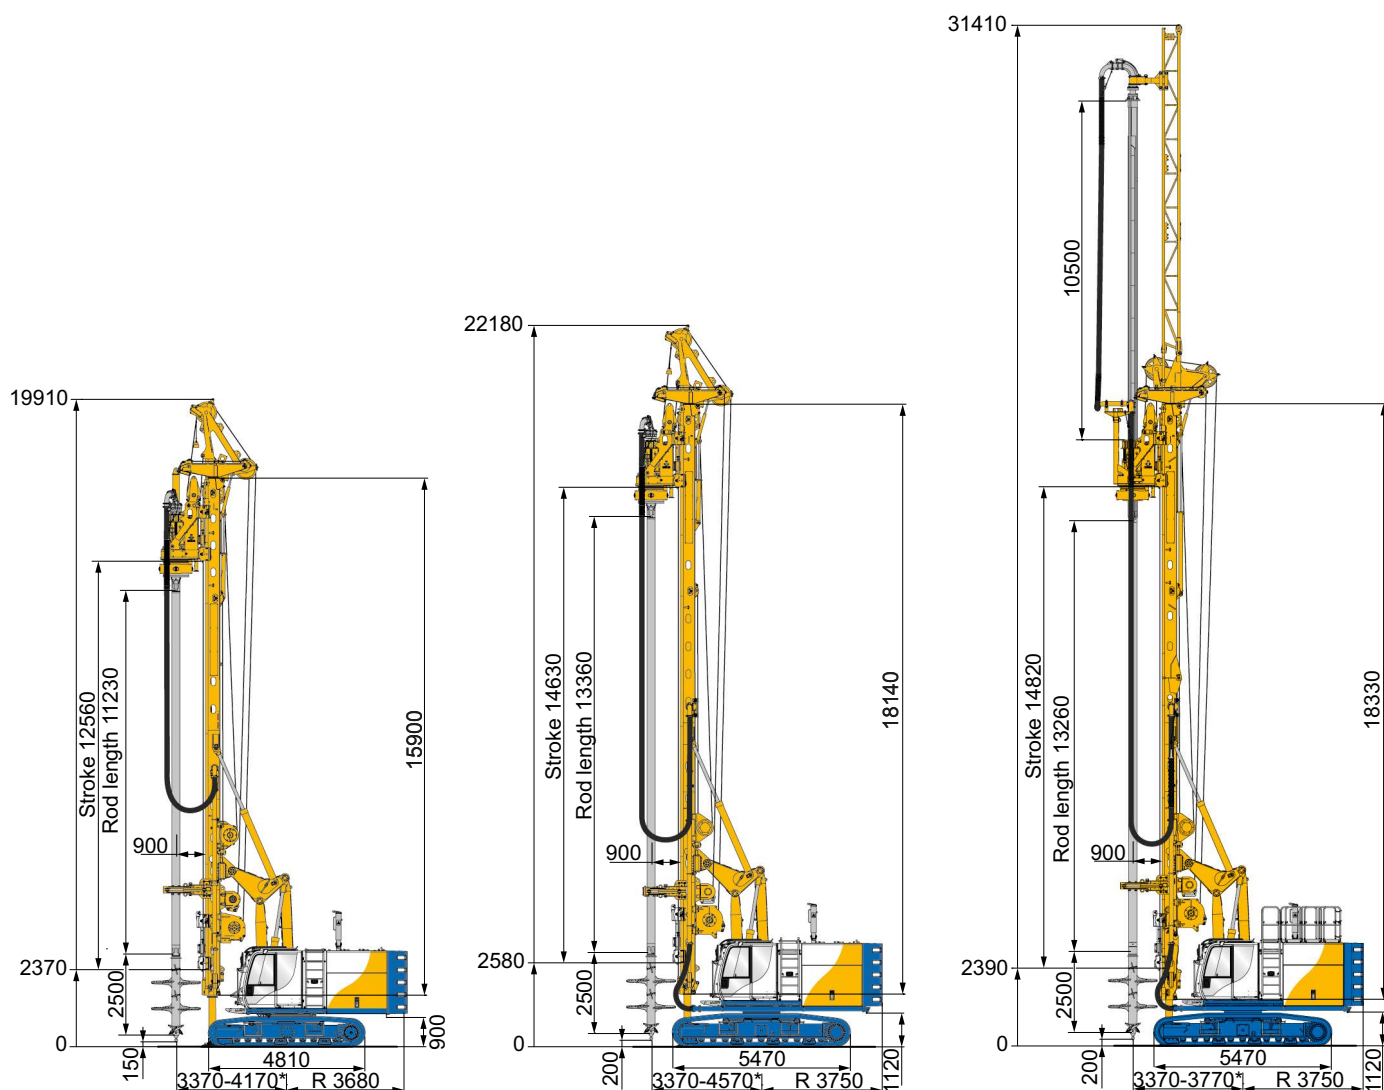

	SCM mixing Compact version	SCM mixing Basic version	SCM mixing Upgraded version
Under carriage	UW 50	UW 60	UW 60
Mast	Single section mast	Single section mast	Multi section mast
Unit height	19.9 m	22.2 m	22.2 m
Kelly extension	without	without / 10.5 m **	without / 10.5 m
Max. mixing diameter	1,500 mm	1,500 mm	1,500 mm
Max. mixing depth	12.2 m	14.2 / 24.7 m	14.4 / 24.9 m
Max. extraction force with main and crowd winch (effective) *	540 kN	600 kN	600 kN
With counterweight	7.6 t	10.0 t	10.0 t


* depending on equipment

** with lattice mast extension

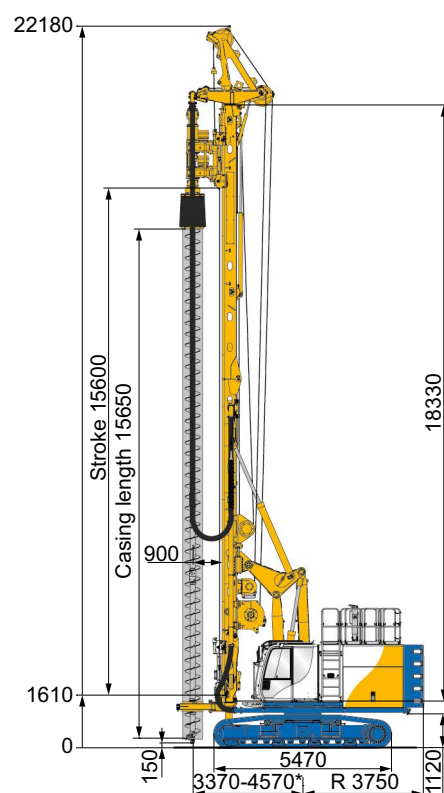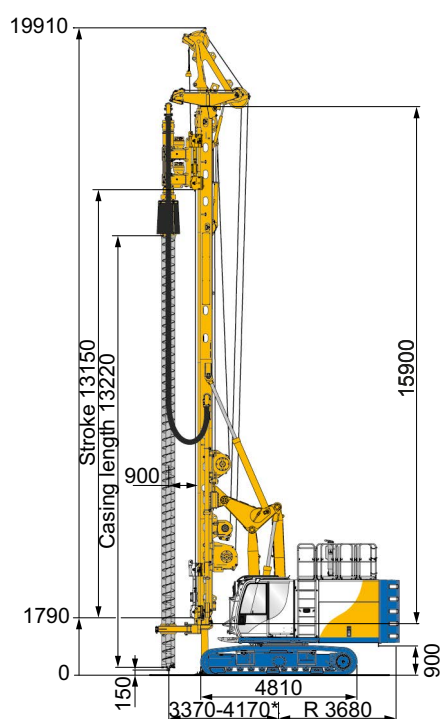


	FoW drilling Compact version DKS 40/60	FoW drilling Basic version DKS 40/60	FoW drilling Upgraded version DKS 40/60
Under carriage	UW 50	UW 60	UW 60
Mast	Single section mast	Single section mast	Multi section mast
Unit height	19.9 m	22.2 m	22.2 m
Torque auger/casing	40/60 kNm	40/60 kNm	40/60 kNm
Max. drilling diameter	508 mm	610 mm	610 mm
Max. drilling depth	12.9 m	15.1 m	15.3 m
Max. extraction force with main and crowd winch (effective) *	350 kN	350 kN	350 kN
With counterweight	7.6 t	10.0 t	10.0 t

* depending on equipment

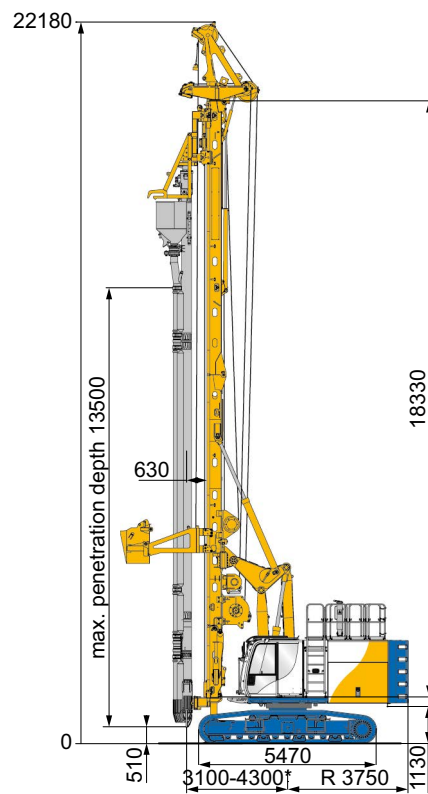

Vibro Displacement (VD) Basic version Vibrator TR 17		Vibro Displacement (VD) Upgraded version Vibrator TR 17
Under carriage		UW 60
Mast	Single section mast	Multi section mast
Unit height		22.2 m
Max. penetration depth		13.5 m
Pressure with crowd winch (effective)		110 kN
Max. extraction force with main and crowd winch (effective)		260 kN
With counterweight		10.0 t

* depending on equipment

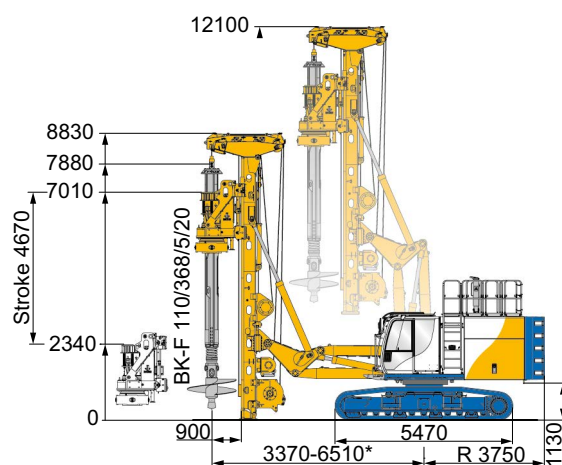


	Low Headroom System Upgraded version
Under carriage	UW 60
Mast	Multi section mast
Unit height	8.8 m / 12.1 m
Lower mast extension	without
Max. drilling diameter uncased	1,500 mm
cased	1,200 mm
Max. drilling depth Kelly BK-F 110/368/5/20	19.6 m



Highlights Extension Package Single Pass Extreme (SPEX)

- Extension of the active feed by 7.1 m due to installation of an upper mast extension
- Further 4 m drilling depth, achievable due to following up with the Kelly extension
- Low investment costs due to the extension of the standard equipment
- Compact transport dimensions due to the hydraulically foldable and lockable mast extension
- Optionally, the Remote Control Multi can be used to fold the mast extension
- Can be used in CFA, FDP and SCM mode

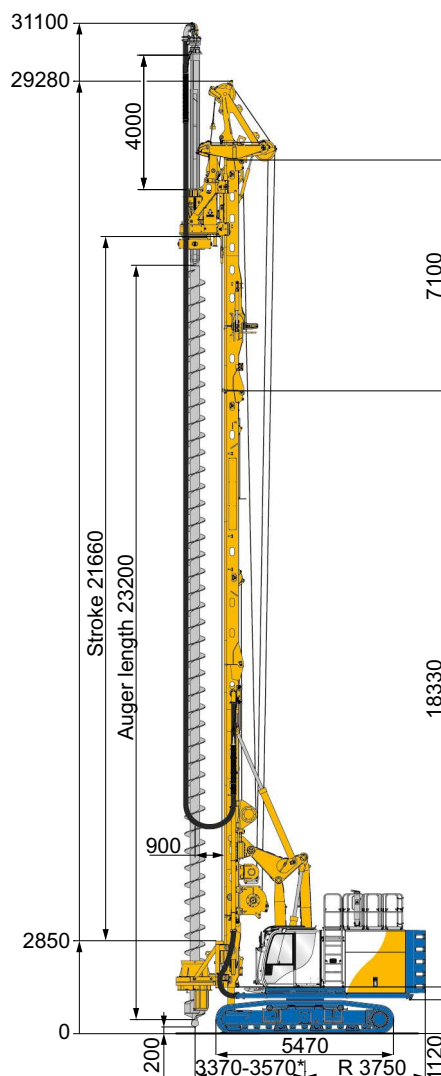

Extension Package Single Pass Extreme (SPEX) Upgraded version			
	CFA drilling	FDP drilling	SCM mixing
Under carriage	UW 60	UW 60	UW 60
Mast	Multi section mast	Multi section mast	Multi section mast
Unit height	29.3 m	29.3 m	29.3 m
Kelly extension	4.0 m	4.0 m	4.0 m**
Max. drilling/mixing diameter	750 mm	510 mm	1,500 mm
Drilling depth with auger cleaner and casing guidance without Kelly extension	21.3 m	21.7 m	21.3 m
with Kelly extension	25.3 m	25.7 m	25.3 m
Max. extraction force with main and crowd winch (effective) *	470 kN	470 kN	470 kN
With counterweight	10.0 t	10.0 t	10.0 t

* depending on equipment

** not recommended


G = Weight
B = Width

Weights shown are approximate values; optional equipment may change the overall weight and dimensions.

Compact Version


With minimized transport height

G = 50.5 t with 7.6 t counterweight

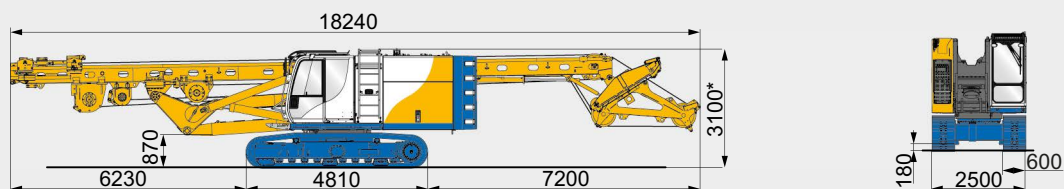


Without rotary drive and Kelly bar

G = 50.5 t with 7.6 t counterweight

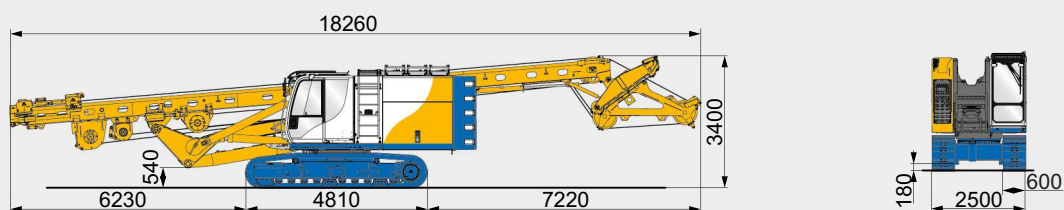

With rotary drive and Kelly bar BK 200/368/3/21


G = 58.9 t with 7.6 t counterweight

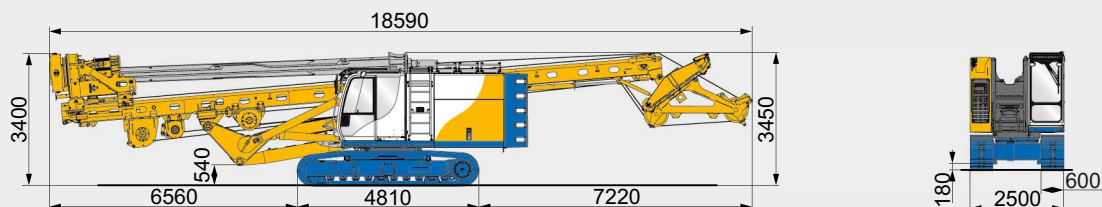

Basic Version

With minimized transport height

G = 57.3 t with 10.0 t counterweight

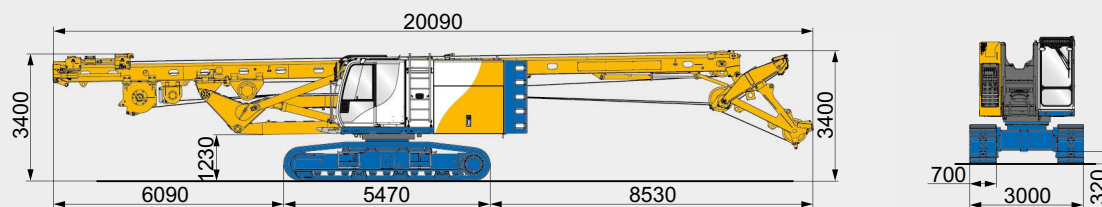

Rotary Drive

G = 4.3 t (KDK 235 K)
4.5 t (KDK 235 S)



* with guardrail 3,250 mm



G = Weight
B = Width

Weights shown are approximate values; optional equipment may change the overall weight and dimensions.



Upgraded Version

With minimized transport height

G = 58.3 t with 10.0 t counterweight

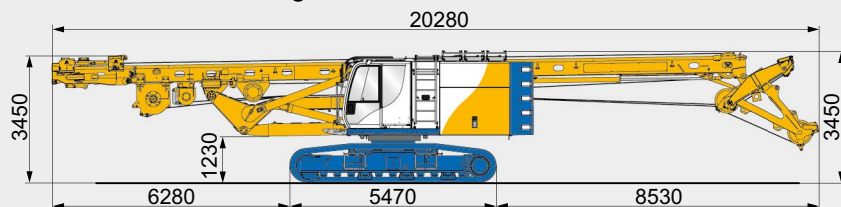



G = 62.8 t with 10.0 t counterweight and rotary drive

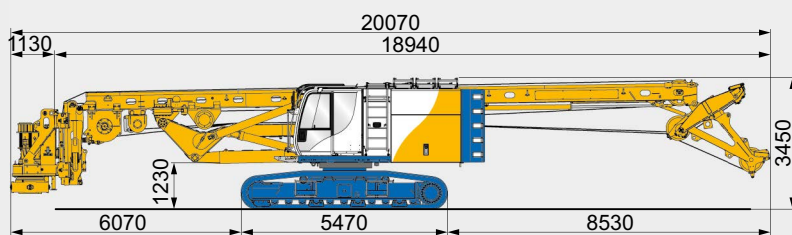

Basic Version / Upgraded Version



Without rotary drive and Kelly bar

G = 57.3 t with 10.0 t counterweight**

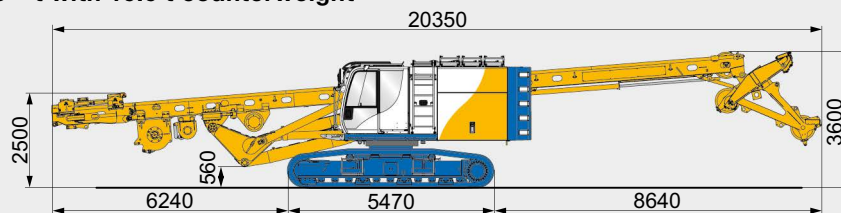

With rotary drive and Kelly bar BK 200/368/3/24



G = 66.0 t with 10.0 t counterweight**

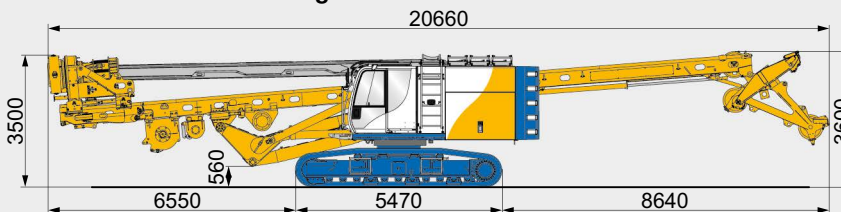

Upgraded Version

Transport with Extension Package SPEX

G = 60.6 t with 10.0 t counterweight

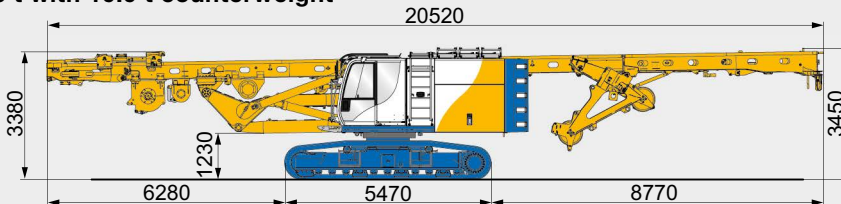


** Additional weight upgraded version 1.0 t



BAUER Service



Global Network

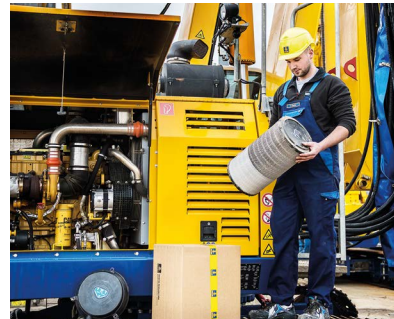

Service



Equipment



Training

International Service Hotline

+800 1000 1200* (freecall)

+49 8252 97-2888

BMA-Service@bauer.de

* Where available

24/7



BAUER Maschinen GmbH
BAUER-Strasse 1
86529 Schrobenhausen
Germany
Tel. +49 8252 97-0
bma@bauer.de
www.bauer.de

Design developments and process improvements may require the specification and materials to be updated and changed without prior notice or liability. Illustrations may include optional equipment and not show all possible configurations. These and the technical data are provided as indicative information only, with any errors and misprints reserved.

PremiumLine