


Vibratory Hammer Specifications

Eccentric Moment	2,500	IN-LBS
Dynamic Force	91	TONS
Frequency, Maintained	1,600	VPM
Amplitude	1.00	IN
Max. Rated Line Pull	45	TONS
Hose Bundle Length	160	FT
Suspended Weight	11,750	LBS
Exciter Weight Without Clamp	7,600	LBS
Transport Weight W/ 200t Clamp and Shipping Stand	14,400	LBS
Shipping Dimensions L X W X H	96 x 72 x 111	IN
200T Clamp Weight	2,800	LBS
125T Caisson Clamp Weight	1,800	LBS (EACH)
HD Caisson Beam Weight	580	LBS (PER FT)




Clamping systems Specification Sheet

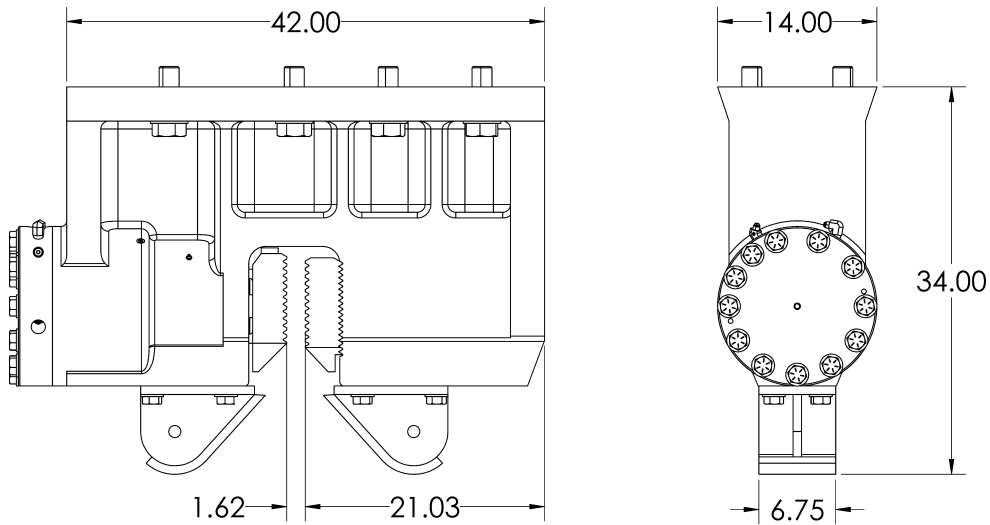



200 Ton Clamp Specifications

Clamp Style	UNIVERSAL CLAMP
Clamping Force	200 TONS
Max Jaw Opening	1.62 IN
200T Clamp Weight	2,800 LBS

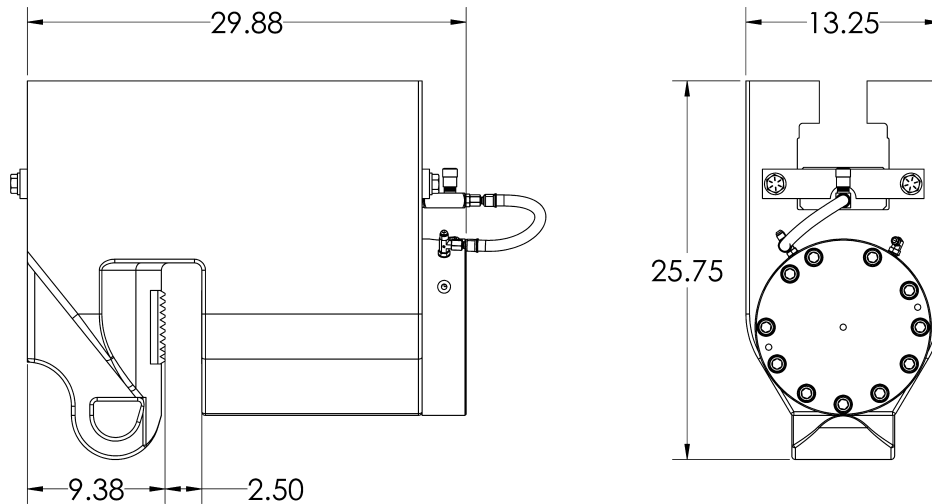

125 Ton Clamp Specifications

Clamp Style	CAISSON CLAMP
Clamping Force	125 TONS
Max Jaw Opening	2.50 IN
125T Clamp Weight	1,800 LBS
Caisson Beam Weight	580 LBS (PER FT)

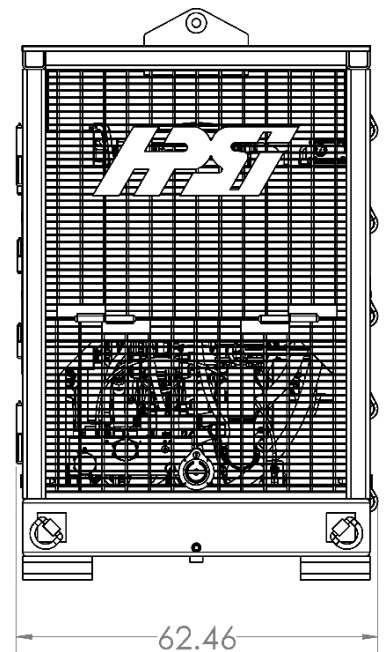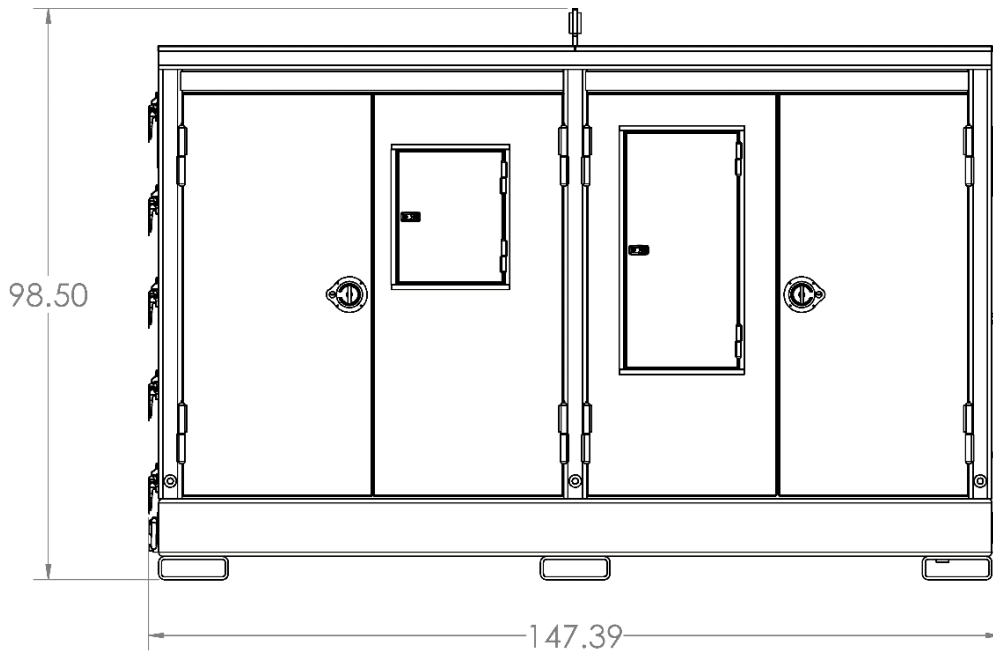

300 Power Pack Specifications

Engine	CATERPILLER C9.3B
Emissions Tier	TIER 4 FINAL
Rated power	415 HP
Speed	2,100 RPM
Hydraulic Flow	96 GPM
Hydraulic Drive Pressure	5,000 PSI
Hydraulic Oil Capacity	200 GAL
Diesel Fuel Capacity	86 GAL
Remote Control Pendant	50 FT
Weight	13,000 LBS