


Vibratory Hammer Specifications

Eccentric Moment	3,000	IN-LBS
Dynamic Force	109	TONS
Frequency, Maintained	1,600	VPM
Amplitude	0.875	IN
Max. Rated Line Pull	45	TONS*
Hose Bundle Length	160	FT
Suspended Weight	12,800	LBS
Exciter Weight Without Clamp	8,200	LBS
Transport Weight W/ 200t Clamp and Shipping Stand	14,600	LBS
Shipping Dimensions L X W X H	96 x 72 x 111	IN
200T Clamp Weight	2,800	LBS
125T Caisson Clamp Weight	1,800	LBS (EACH)
HD Caisson Beam Weight	580	LBS (PER FT)

*60 TON - MAX LINE PULL OPTION AVAILABLE




Clamping systems Specification Sheet

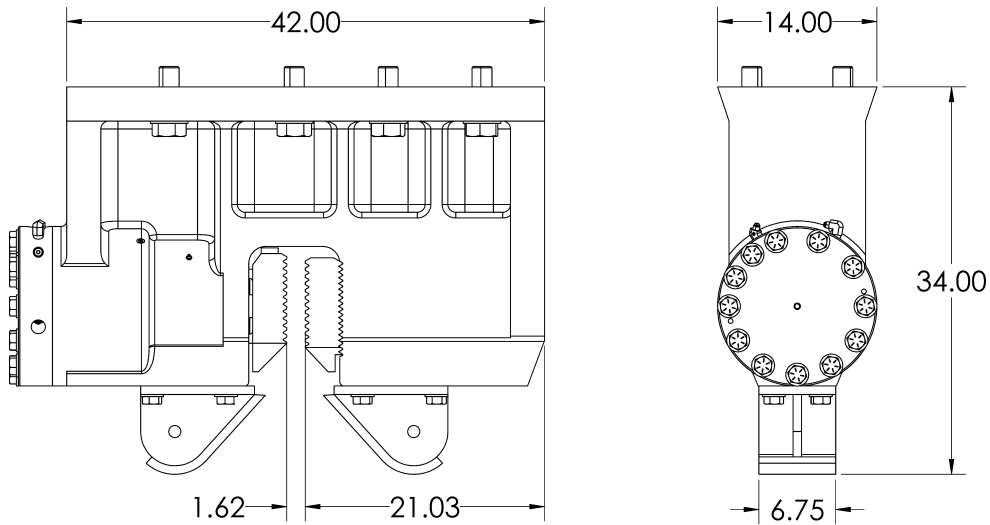



200 Ton Clamp Specifications

Clamp Style	UNIVERSAL CLAMP
Clamping Force	200 TONS
Max Jaw Opening	1.62 IN
200T Clamp Weight	2,800 LBS

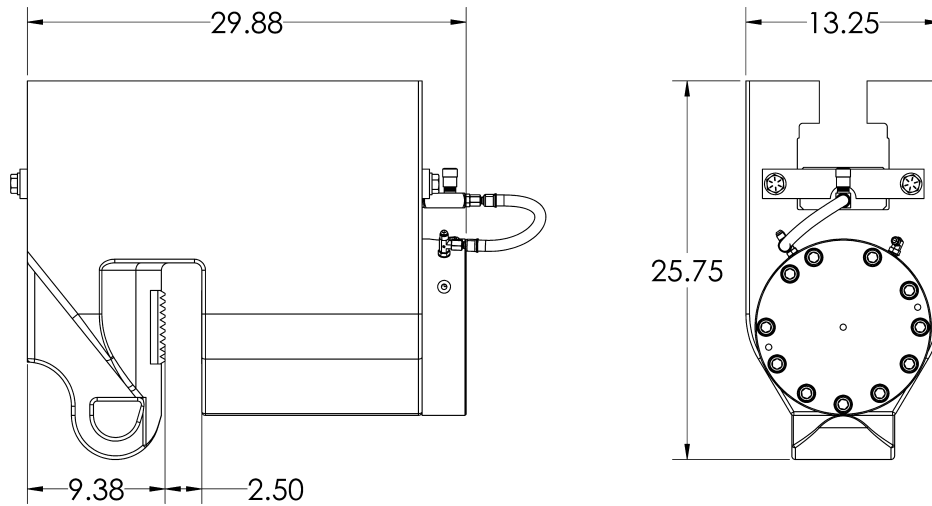

125 Ton Clamp Specifications

Clamp Style	CAISSON CLAMP
Clamping Force	125 TONS
Max Jaw Opening	2.50 IN
125T Clamp Weight	1,800 LBS
Caisson Beam Weight	580 LBS (PER FT)

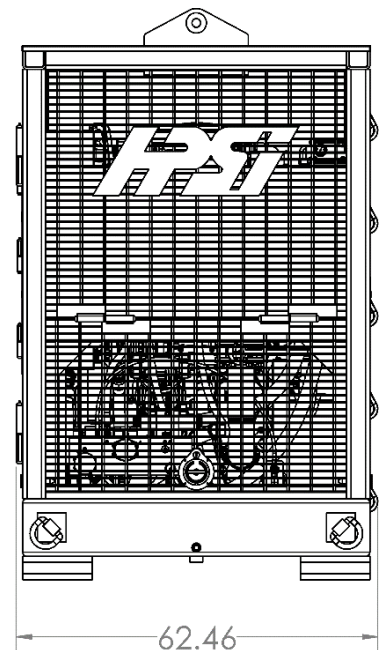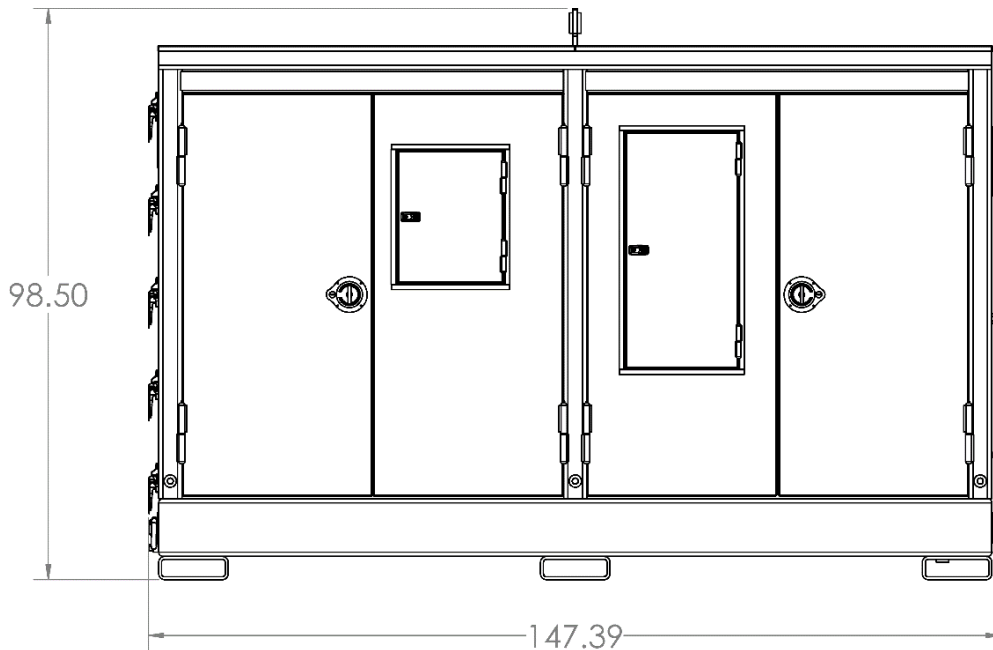

300 Power Pack Specifications

Engine	CATERPILLER C9.3B
Emissions Tier	TIER 4 FINAL
Rated power	415 HP
Speed	2,100 RPM
Hydraulic Flow	115 GPM
Hydraulic Drive Pressure	5,000 PSI
Hydraulic Oil Capacity	200 GAL
Diesel Fuel Capacity	86 GAL
Remote Control Pendant	50 FT
Weight	13,000 LBS